




MATING PLUG



RoHS
Compliance

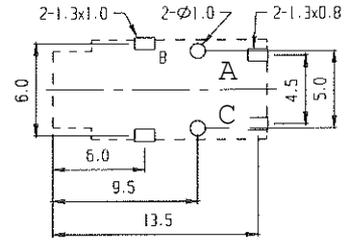

SCHEMATIC

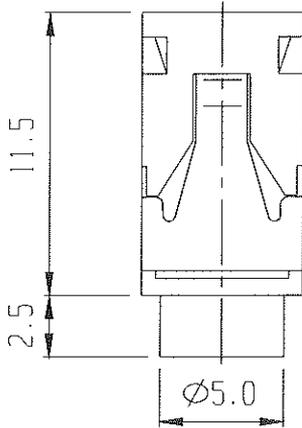

P.C.B. LAYOUT

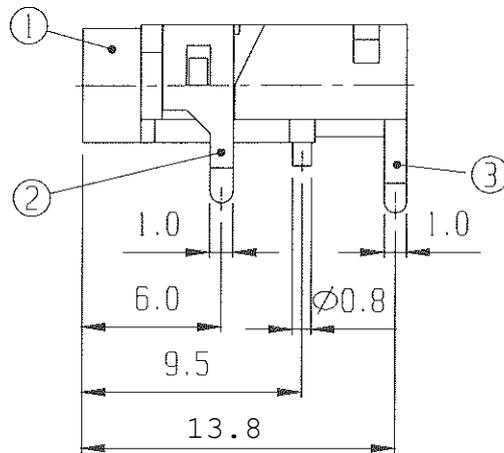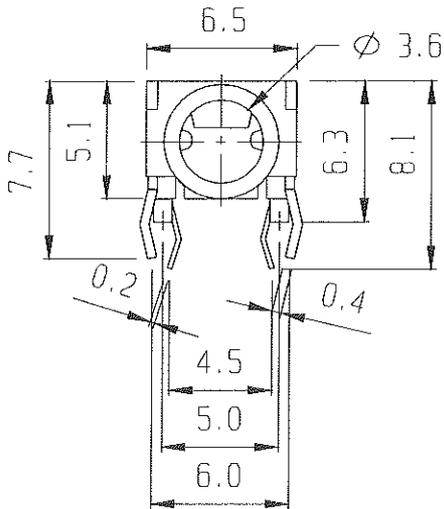

3	TERMINAL	PBS	2	Ag PLATED					
1	FRAME	POM	1		2	TERMINAL	BRASS	1	Ag PLATED
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: 3.5mm STEREO JACK

RATING: DC 30V 0.3A

MODEL NO: ST-3530

CONTACT RESISTANCE: 50mΩ max.

INSULATION RESISTANCE: 100MΩ AT 500V DC

TOLERANCE UNIT: MM

DWN.

WITHSTAND VOLTAGE: AC 500V for 1 minute

UP TO 1.0:±0.1 SCALE: 3:1

CHK'D.

OPERATION FORCE: REFER ATTACH SPECIFICATION

1.0 TO 10.0:±0.2 VERSION: 01

APPD.

SWITCHING LIFE: 5K cycles min.

OVER 10.0:±0.3 DRWG NO:

BY: Greyson
DATE: 15 JUL 2010

SEE-PLUS INDUSTRIAL LTD.

